

# BALI TABLE RUNNER

## Requirements.

Batik Stripe 1mt  
Background fabric 1mt

## Cutting.

Mark one edge of the Batik Stripe with a water soluble pen.  
(This will be your TOP edge to which you will sew the background strips)

2	1"	x	WOF
4	1"	x	WOF
4	1¼"	x	WOF
4	1½"	x	WOF
4	2"	x	WOF
4	1½"	x	WOF
4	1½"	x	WOF

## Background fabric.

2	2½"	x	1"
4	4½"	x	1"
4	6½"	x	1 ½"
4	8½"	x	2"
4	10½"	x	2 ½"
4	12½"	x	1 ½"
4	14½"	x	1 ½"
4	2½"	x	WOF

Construction. Take the centre 1" Batik piece and sew the BG 2 ½" x 1" strip to the marked edge. Iron seam allowance towards the Batik fabric.


The following pieces are sewn to either side of this strip.

eg. Take (2) 1" Batik strips and sew (2) 1" x 4½" BG strips to marked edge. Stitch these to either side of centre strip.

Continue in this manner with the remaining strips. Iron seam allowances away from centre towards the edges.

Repeat these steps with the remaining strips.

# Note: When sewing long strips together, start stitching from opposite ends in alternate rows to keep work 'straight'.

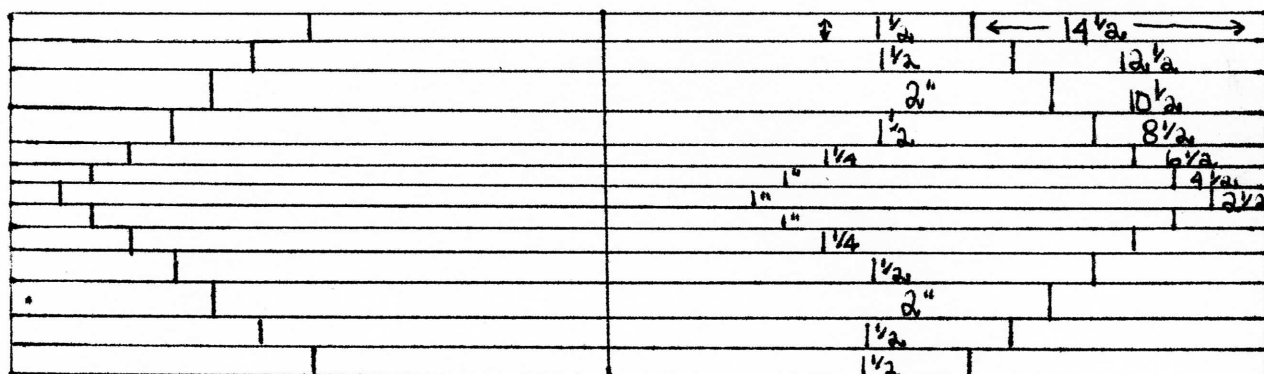

Fold middle, uneven edges under top. until you are happy with the length of the runner. Watch the pattern in the Batik fabric and try to keep a diamond shape in the centre.

When happy with placement, square off the ends and sew together.

Take (2)  $2\frac{1}{2}$  x WOF background strips and sew the short ends together. Repeat with the remaining 2 strips.

Measure length of table runner. Cut your 2 joined strips to this length and attach to sides.

The remaining background fabric is cut into (5)  $2\frac{1}{2}$  x WOF and joined to make binding once the runner is quilted.